


► **DANDY CURB SACK™** ◀



▶ **DANDY CURB SACK™** ◀

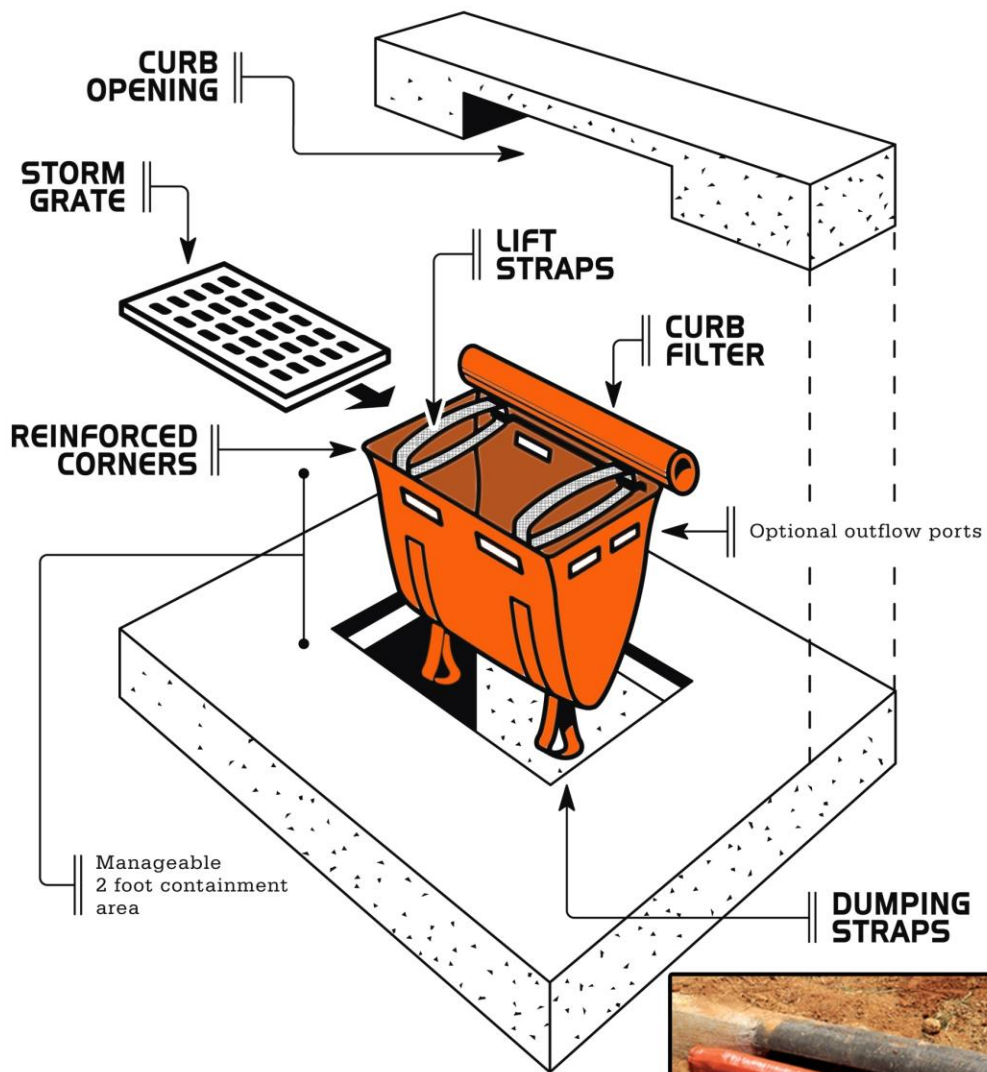

With an open-top design, the Dandy Curb Sack fits to any size curb and gutter inlet. Its unique design allows it to filter sediment-laden water with ease. The suspended solids are allowed to settle out of the slowed flow and are captured quickly by the Dandy Curb Sack before entering the inlet.

Get Maximum Benefits With Dandy:

- Unique patented design keeps silt, sediment and debris out of storm systems
- Conforms to shape of curb
- Fabricated from a high-visibility monofilament geotextile
- Reduces the need to flush or clean inlets
- Sizes to fit any curb inlet
- Available with optional oil absorbents
- Easy to install, inspect and reuse, saving time and money

Installation:

1. Remove the grate from the catch basin and stand on end.
2. Move the top lifting straps out of the way and place the grate into the Dandy Curb Sack so that the grate is below the top straps and above the lower straps
3. Now position the top straps back in place so that they are on top of the grate
4. Grab top straps and carefully insert the Dandy Curb Sack into the grate's frame
Make sure cylindrical portion is up against the curb opening to prevent silt, sediment and debris from entering inlet here

Maintenance:

Remove all accumulated sediment and debris from vicinity of the unit after each storm event. After storm event and at regular intervals, look into the Dandy Curb Sack. If the containment area is more than 1/3 full of sediment, the unit must be emptied.

To empty unit, simply lift the unit out of the inlet using the lifting straps and remove the grate. If using optional oil absorbents, replace absorbent pillow when near saturation.



www.maritimehydroseed.com
506.672.1600